
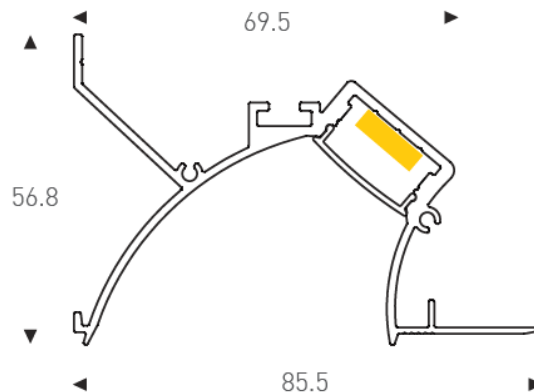


LED PROFILE MICRO COVE

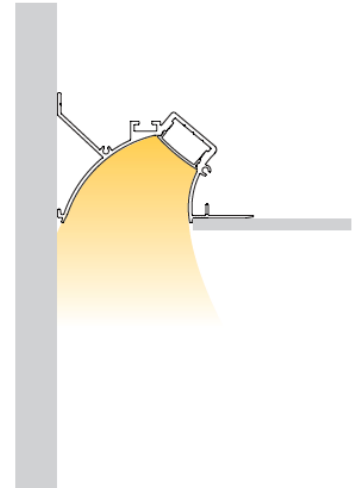

CODE	WATTS	CCT	CRI	OPERATIONAL VOLTAGE	FINISH	LUMENS	DIMMABLE	BEAM ANGLE
PROMICROCOVE	19.2W/M	2700K 3000K 4000K 6500K	>90	24V	Standard Silver	1700/M	TRIAC/DALI/0-10v	90°