
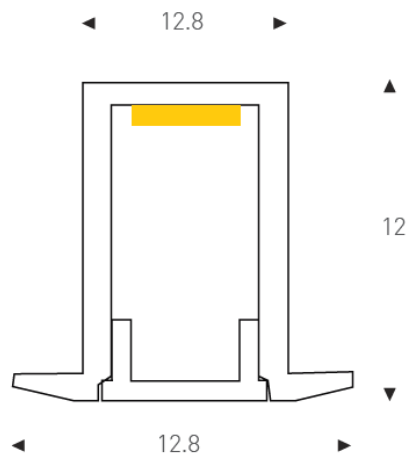


LED PROFILE WINGED MICRO

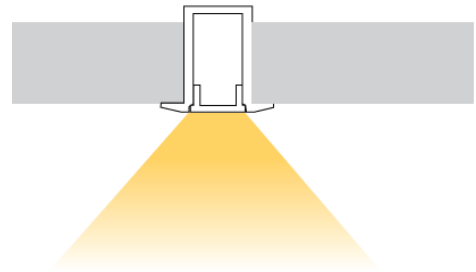

CODE	WATTS	CCT	CRI	OPERATIONAL VOLTAGE	FINISH	LUMENS	DIMMABLE	BEAM ANGLE
PROWINGEDMICRO	9.6W/M	2700K 3000K 4000K 6500K	>90	12V	Standard Silver	720/M	TRIAC/DALI/0-10v	120°